



YC60-9



CE

Machine weight : 5700 kg

Bucket capacity : 0.21 m³

Engine power : 30.7/2200 kW/rpm

- Structural Reliability
- Excellent Performance
- High Efficiency

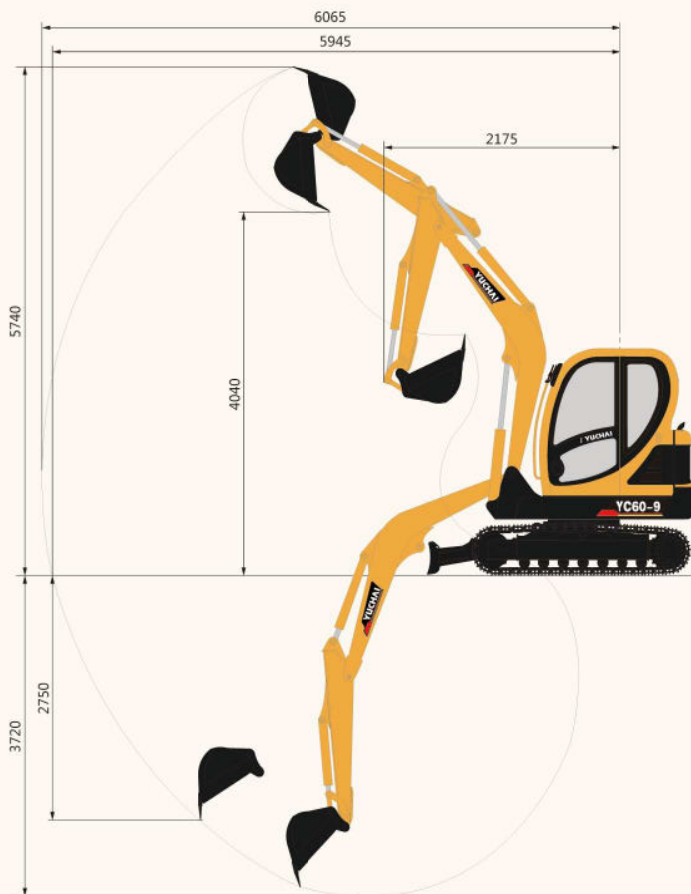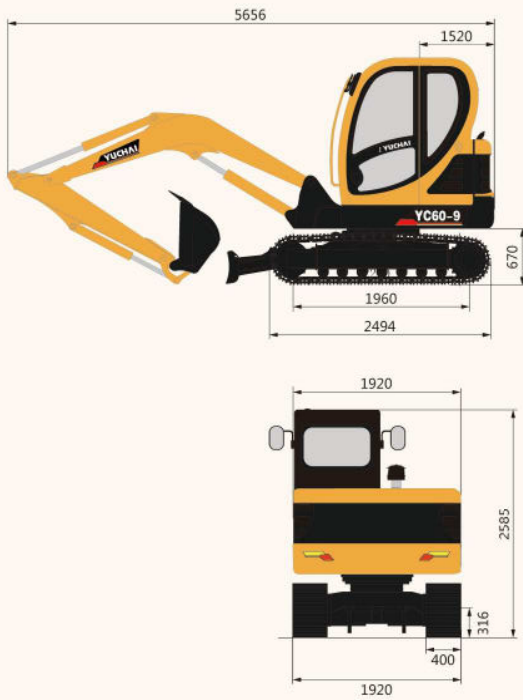

► Technical Specification

Basic parameter

| | |
|-----------------|---------------------|
| Machine weight | 5700 kg |
| Bucket capacity | 0.21 m ³ |
| Width of bucket | 742 mm |

Performance parameter

| | |
|------------------------------|------------------|
| Engine model | Kubota V2403 |
| Engine power | 30.7/2200 Kw/rpm |
| Gradeability | 70%(35°) |
| Max. digging force of arm | 27.5 kN |
| Max. digging force of bucket | 36.6 kN |
| Traveling speed | 2.2/3.6 km/h |
| Max. hauling force | 46.5 kN |
| Slewing speed of platform | 9~11 rpm |

Operating parameter

| | |
|-------------------------------------|---------|
| Max. digging height | 5740 mm |
| Max. digging depth | 3720 mm |
| Max. digging radius | 6065 mm |
| Max. digging radius on ground level | 5945 mm |
| Max. dumping height | 4040 mm |
| Min. slewing radius | 2175 mm |
| Max. vertical digging depth | 2750 mm |

Transportation dimension

| | |
|----------------------------------|---------|
| Overall length of transportation | 5656 mm |
| Overall width | 1920 mm |
| Overall height | 2585 mm |

Other Parameter

| | |
|---|---------|
| Width of undercarriage | 1920 mm |
| Length of track | 2494 mm |
| Width of track | 400 mm |
| Height between undercarriage and ground | 316 mm |
| Height between platform and ground | 670 mm |
| Platform tail turning radius | 1520 mm |
| Track gauge | 1960 mm |
| Fuel tank capacity | 103 L |
| Hydraulic oil tank capacity | 74 L |

Guangxi Yuchai Heavy Industry Co.,Ltd.
 Address:No.168 Tianqiao Road, Yulin, Guangxi, China
 Tel: +86-775-3223505,3223500
 Fax:+86-775-3289578
 Email: dig@yuchai.cn, ychi-export@yuchai.cn
 www.yuchaihi.com



Specifications are subject to change without prior notice